
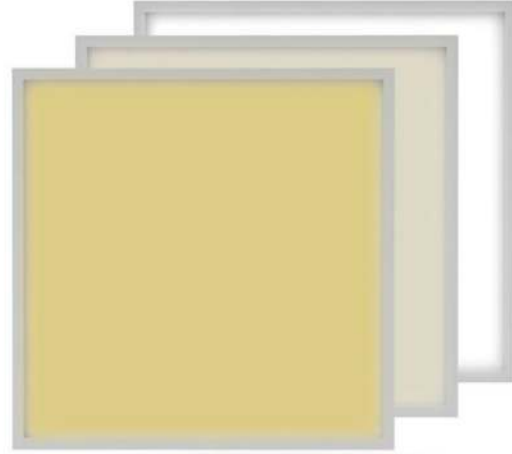


HCL Panel

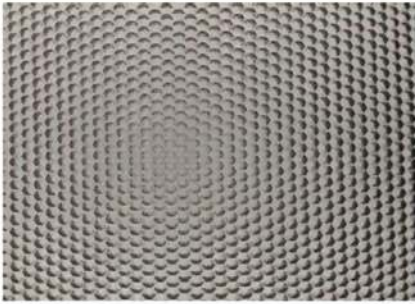

| | |
|--|-------------------------|
| CCT | 2800K – 6500K |
| CRI | 80 / 90 |
| SDCM | 4 |
| UGR | <19 |
| LIGHT GUIDING PLATE | 3mm PMMA |
| DIFFUSER | Low Glare Honeycomb |
| LED LIFETIME LUMEN DEPRECIATION | L70 B10 @ 50000Hrs |
| DRIVER LIFETIME SPECIFICATION | 50000Hrs |
| DIMMING METHODS | DALI DT8 Commands |
| EMERGENCY STANDBY TIMES | 60Min / 120Min / 180Min |
| TOTAL WARRANTY | 5 Yrs |

| SIZE | WATTAGE | EFFICIENCY | LUMENS |
|------------------|---------|--------------|-------------|
| 595 mm x 595 mm | 36W | 100 Lumens/W | 3600 Lumens |
| 1195 mm x 295 mm | 36W | 100 Lumens/W | 3600 Lumens |
| 1195 mm x 595 mm | 60W | 100 Lumens/W | 6000 Lumens |

H E A L T H C A R E