


## Kuma LS7578CC

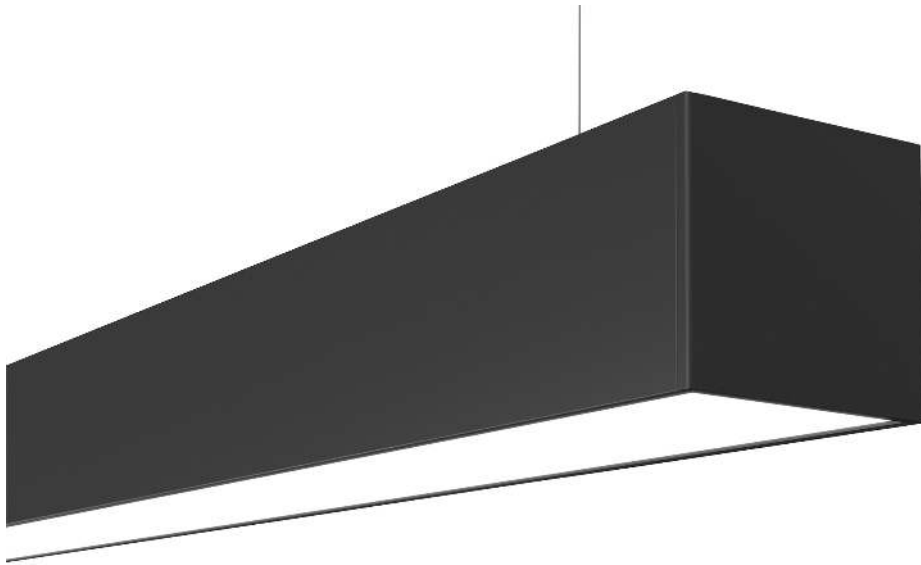

A R C H I T E C T U R A L

<b>SIZE</b>	76 mm x 78 mm
<b>MOUNTING OPTIONS</b>	Suspended Surfacemount Flush Mounted
<b>CCT</b>	3000K / 4000K / 5000K / 6500K
<b>CRI</b>	80 / 90
<b>SDCM</b>	3
<b>UGR</b>	<21
<b>HOUSING</b>	Extruded Aluminium
<b>HOUSING COLOURS</b>	Standard Anodized / Black / White / Custom RAL
<b>DIFFUSER</b>	Opal UV Stabilized PMMA
<b>END CAPS FIXING</b>	Screws / Magnetic
<b>LED LIFETIME LUMEN DEPRECIATION</b>	L80 B10 @ 50000Hrs
<b>DRIVER LIFETIME SPECIFICATION</b>	F10 – 100000Hrs
<b>DIMMING METHODS</b>	DALI / Triac / 1-10V
<b>EMERGENCY STANDBY TIMES</b>	60Min / 120Min / 180Min
<b>TOTAL WARRANTY</b>	5 Yrs

LENGTH	MA	WATTAGE	EFFICIENCY	LUMENS
1200 mm	250Ma	23W	116 Lumens/W	2707 Lumens
1200 mm	350Ma	34W	110 Lumens/W	3689 Lumens
1200 mm	500Ma	49W	103 Lumens/W	5098 Lumens

