


Kuma LS7977CV



SIZE	79 mm x 77 mm
MOUNTING OPTIONS	Suspended Surfacemount Flush Mounted
VOLTAGE	24V
WATTAGE / M	30 W/M
LED°S / M	400 LED / M
CCT	3000K / 4000K / 5000K / 6500K
CRI	80 / 90
SDCM	2
UGR	<21
HOUSING	AL6063 T5 Extruded Aluminium
HOUSING COLOURS	Standard Anodized / Black / White / Custom RAL
DIFFUSER	86% Transparent UV Stabilized Poly Satin
END CAPS	Magnetic
LED LIFETIME LUMEN DEPRECIATION	L80 B50 @ 50000Hrs
DRIVER LIFETIME SPECIFICATION	F10 – 100000Hrs
DIMMING METHODS	DALI / Triac / 1-10V /
EMERGENCY STANDBY TIMES	60Min / 120Min / 180Min
TOTAL WARRANTY	5 Yrs

LENGTH	WATTAGE	EFFICIENCY	LUMENS
1000 mm	30W	67 Lumens/W	2010 Lumens
1500 mm	45W	67 Lumens/W	3015 Lumens
2000 mm	60W	67 Lumens/W	4020 Lumens
2500 mm	75W	67 Lumens/W	5025 Lumens

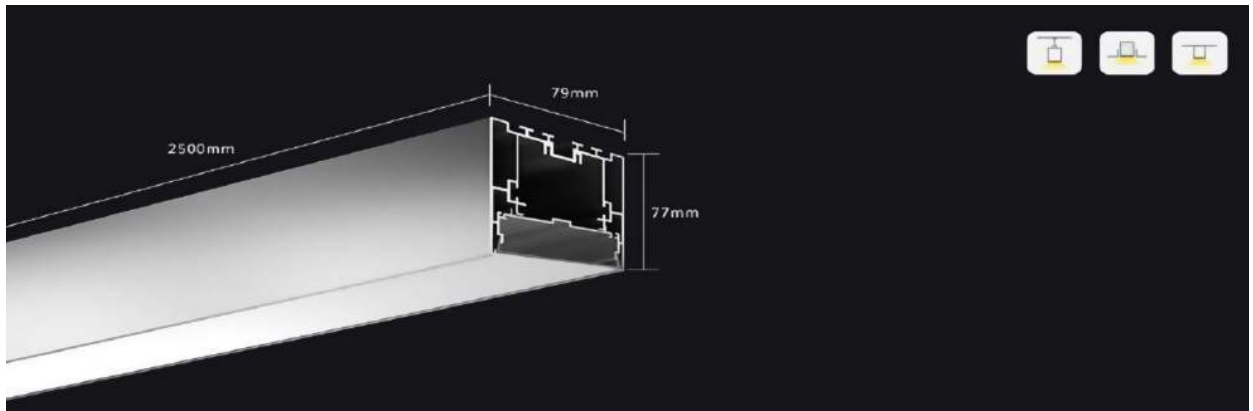